

# EVOQ SERIES SPECIFICATIONS

The Largest Choice of  
**Hydraulic Wrenches** just got better....




- In Line Reaction Arm!
- Hands-Off Operation!
- Faster Stroke!
- Less Moving Parts!
- Anti-Back Lash Mechanism!
- Universal Design to Fit Every Application!
- Accurate Repeatability!

The EVOQ series wrenches have similar features to the PSD series wrenches but with the additional advantage of having an "Inline to square drive" reaction arm which prevents torsional twisting load on the body of the hydraulic wrench that happens with conventional hydraulic wrenches.

## Technical

Model No.	EV-2	EV-3	EV-5	EV-7	EV-11
Square Drive	3/4"	1"	1.1/2"	1.1/2"	1.1/2"
Min. Torque Kg-m(Ft/Lbs)	17 (127)	45 (330)	77 (560)	102 (740)	152 (1100)
Max. Torque Kg-m(Ft/Lbs)	175 (1270)	460 (3,330)	770 (5,600)	1,020 (7,400)	1,520 (11,000)
Output Accuracy	+/-3%	+/-3%	+/-3%	+/-3%	+/-3%
Repeatability	100%	100%	100%	100%	100%
Duty Cycle	100%	100%	100%	100%	100%
Tool Weight Kgs/(Lbs)	1.77 / (3.90)	4.09 / (9.00)	8.85 / (19.50)	13.50 / (29.60)	16.80 / (37.10)

Easy change over of Square Drive from loosen to tighten.

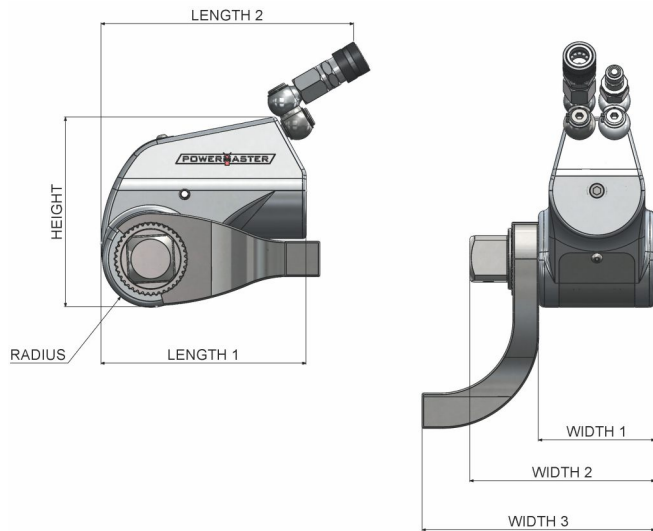

## Dimensions

Model No.	EV-2		EV-3		EV-5		EV-7		EV-11	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
Height	104.60	4.12	134.50	5.29	162.30	6.40	182.20	7.17	198.35	7.81
Length 1	109.00	4.30	148.80	5.85	176.00	6.93	208.43	8.20	227.35	8.95
Length 2	170.90	6.72	209.00	8.22	216.70	8.53	290.93	11.45	313.33	12.33
Radius	25.00	0.98	32.50	1.27	41.28	1.62	45.20	1.78	49.88	1.96
Width 1	66.00	2.59	82.80	3.25	100.00	3.93	116.80	4.60	125.00	4.92
Width 2	101.00	3.97	123.30	4.85	159.00	6.25	177.20	6.97	186.30	7.33
Width 3	141.00	5.55	183.00	7.20	200.00	7.87	218.00	8.58	250.70	9.87