


SUGAR MILL TUBE CLEANERS

1" & UP
I.D.

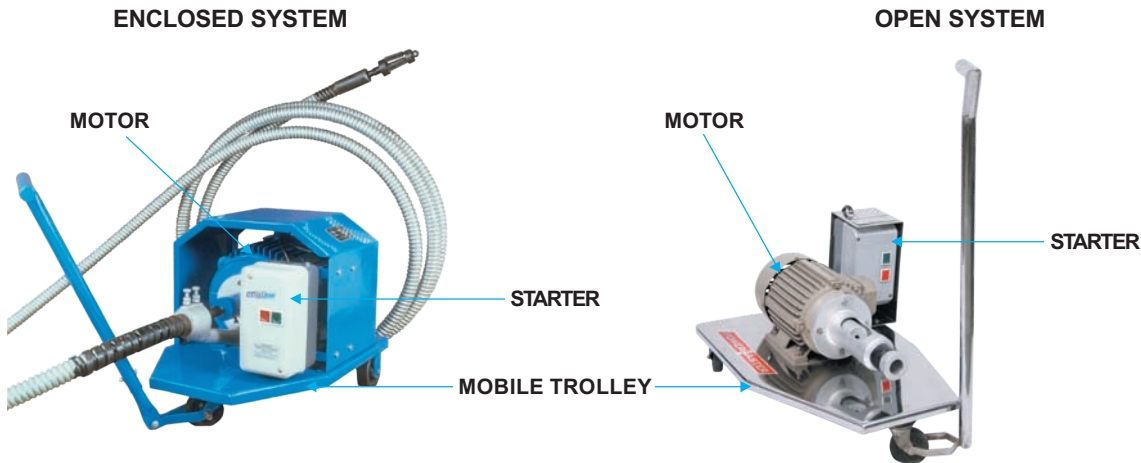

FLEXIBLE SHAFT MACHINE (ELECTRICALLY DRIVEN)

FLEXIBLE SHAFT MACHINE is a self-contained portable unit, mounted on a 3-wheel trolley, fitted with a carrying handle. It incorporates a directly coupled, totally enclosed squirrel cage, 2800 rpm. continuously rated electric motor. Selecting the H.P. of the motor depends upon length and size of flexible shaft and nature of scaling. It is controlled by a push button starter which is provided with three thermal adjustable overload relays. Each machine is fully wired, carefully tested and is fitted with a 10-foot length of PVC Cable to main supply. Longer cable can be supplied upon request. Please consult us if your electric supply is different from listed below. Motors for alternate supplies are also available.

Model No.	Motor H.P.	Speed (RPM)	Electric Supply
TC-30	3.0	2800	440V
TC-50	5.0		3 PHASE
TC-75	7.5		50 Hz



FLEXIBLE SHAFTS (DRIVES)

The Flexible Shaft transmits constant torque / power from the motor unit to the tool head or brush within the tube. **INNER CORE** - is double wound in opposing layers made out of high tensile-spring steel wires and passed through stress relieving process, made to absolute-vibration free performance and continuous duty.

OUTER CASING - is flexible, made out of galvanized steel strip and provided with special steel anti-friction lining for the entire length. **CONNECTIONS** - Suitable motor connection at one end and detachable ball bearing hand piece (tool holder) with threaded spindle for tool head or brush at other end.

The size of the flexible shaft is based on internal diameter (I.D.) of the tube. The length of flexible shaft required is the addition of the length of the longest tube plus the distance between the mouth of the tube and the position of the power unit. The power unit should be located so that the flexible shaft be kept as straight as possible.

Inner Core mm (inch)	12 - 13 (1/2")	15 - 16 (5/8")	19 - 20 (3/4")
Outer Casing mm (inch)	25 - 26 (1")	31 - 32 (1.1/4")	34 - 35 (1.3/8")
Length			
mtr.	feet	Model No.	Model No.
7.5	25.0	IFS-105-25	IFS-106-25
9.0	30.0	IFS-105-30	IFS-106-30
10.0	33.0	IFS-105-33	IFS-106-33
12.0	40.0	IFS-105-40	IFS-106-40
15.0	50.0	IFS-105-50	IFS-106-50
18.0	60.0	IFS-105-60	IFS-106-60
20.0	65.0	IFS-105-65	IFS-106-65
Spare Inner Core Per mtr.	IC-105	IC-106	IC-107
Spare Outer Casing Per mtr.	OC-105	OC-106	OC-107
Spare Hand Piece	HP-105	HP-106	HP-107

1.37"
&UP
I.D.

VARIABLE FREQUENCY DRIVE MACHINE



VARIABLE FREQUENCY DRIVE MACHINE (ELECTRICALLY DRIVEN)

Electric Tube Cleaners with Variable Frequency Drive (VFD), facilitates control over speed of motor by varying the frequency as per our requirement.

Adjustable speed drive in electro-mechanical drive system to control AC motor speed and torque by varying motor input frequency. Variable frequency drive used in a drive system have three main sub systems - AC motor, main drive controller assembly and drive operator interface.

Features :

- Effortless, easy to operate.
- Flexible shaft can be easily connected and disconnected.
- Vary the speed as per our requirement.
- Easily interchangeable of various shafts and accessories for maximum versality wheels for easy transportation. compact and easy to carry.

Tube I.D.		Tube Cleaner Model No.	Motor Power		RPM	Torque		Weight		Electric Supply
mm	inch		HP	Kw		Nm	Lb-Ft	LBS	KG	
35 - 45	1.37" - 1.77"	VFD - 30	3	2.26	300 - 5600	5.5	4	100	45	440 V, 3-PHASE 50HZ
35 & 45	1.37" - 1.77"	VFD - 50	5	3.73	300 - 5600	9	7	110	50	
35 & UP	1.37" - UP	VBD - 75	7.5	5.59	300 - 5600	14	10	132	60	