

POWER PACKS

AP1000 Pneumatic




AP1000 with Mono Port



AP1000 with Quadra Port (4 Port)

AP1000 - High Flow - High Speed for Heavy Duty Application

- Quadra-Port Multi-Port Manifold (Max. 4 Ports).
- Cool running continuous duty axial piston pump.
- Powerful industrial duty air motor.
- Runs on 70 cfm / 90 PSI of air.
- Quiet operation (approx. 75-80 dBA @ 10,000 PSI).
- Rugged remote pendant to control motor and valve.
- Easily adjustable pressure control knob.
- Auto-dump relieves oil pressure from hoses.
- Filter-lubricator for long trouble free operation.
- 2 Gallon oil reservoir.
- Precise PSI/BAR pressure gauge.
- Quick-connect no-drip couplers with safety locking collar.
- Supplied with dual non-conductive high pressure hose with couplers.

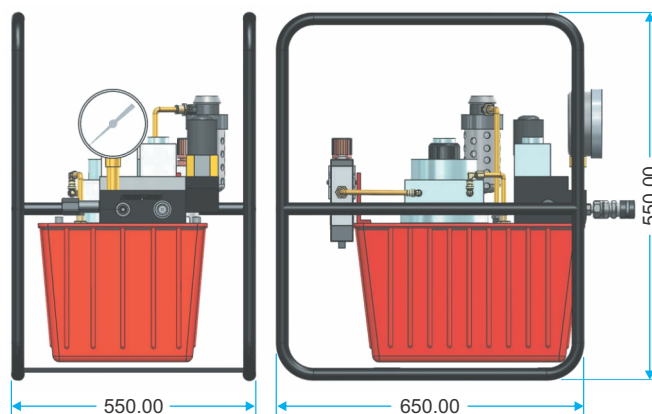

Resvr. Size (Gal)	Valve		Motor Specifications	Flow Rate @ 70 cfm/ 90psi		Weight	
	Control	Type		600 psi	10,000 psi	kg	lbs
2	Solenoid	3 Way/2 Pos.	Industrial Rotary Air	11 lpm	0.9 lpm	37	81

Retract pressure is preset at 1,300 PSI.

PUMP ACCESSORIES



▲
Quadra-Port
Multi-Port Manifold
(Max. 4 Ports)



▲
Hoses
Hoses available in
all lengths
(15' hose standard
with all pumps)



▲
No-Drip Quick-Connect Couplers
(Standard on all
Powermaster
equipment)



▲
Quadra-Port
Multi-Port Manifold
(Max. 4 Ports)



▲
Hoses
Hoses available in
all lengths
(15' hose standard
with all pumps)



▲
**1/4\" NPT SCREW
COUPLER**
(Standard on all
Powermaster
equipment)